

A10, Balaji Industrial Estate,

Phone No: - +91 82 6001 3001

Tondre Village, Taloja MIDC, Taloja

eMail: - connect@homecoat.in

Dist. Raigad, Panvel, Maharashtra 410208

Web: - www.homecoat.in



Comfort Tuff BeYouty Texture

A decorative and protective exterior coating, this synthetic grooved finish is based on co polymer emulsion reinforced by quartz aggregate. It may be applied on prepared masonry, concrete, plaster, gypsum and wood surfaces. It also has 3 more variants namely VERTICAL, CIRCULAR and ANGULAR.



Vertical



Horizontal



Rainfall




■ Key Features

- ✚ Durable, long lasting finish
- ✚ Resistant to humidity, rain and hot weather
- ✚ Excellent adhesion
- ✚ Fungus and bacteria resistant
- ✚ Easy to apply
- ✚ Water resistant
- ✚ Crack bridging

■ Spreading capacity:

- ✚ 2-2.5 kg per kg

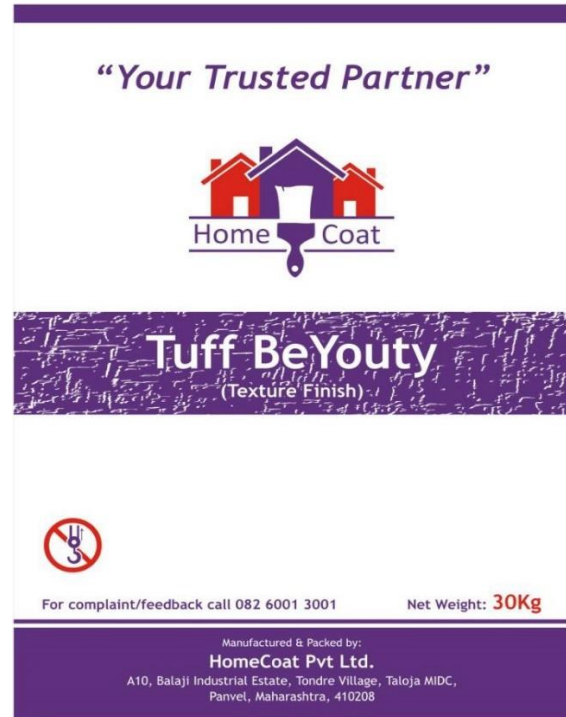

■ Texture

■ Surface Preparation

- ✚ Ensure that the surface to be painted is free from any loose paint, dust and grease.
- ✚ Any previous growth of fungus, algae or moss needs to be removed thoroughly by vigorous wire brushing and cleaning with water.

■ Directions for Use

- ✚ For freshly plastered surface, apply 1 coat of Tuff BeYouty Texture finish by trowel. Add 3-5% water depending on application requirement.
- ✚ Allow the texture to dry for 16-18 hrs.
- ✚ Apply 2 coats of WinnerOne Comfort Exterior Emulsion as top coat (recommended).



■ Thinning Ratio:

- ✚ For a freshly plastered surface apply a coat of Tuff BeYouty finish by trowel and add 4-5% water into it depending on the application requirement.

■ Technical Specifications

Property	Data
Color	Base colors
Finish	Texture
Solids	86.00 ± 2%
Specific Gravity kg/ltr	2.0 ± 0.05
Theoretical Spreading Rate	2 -2.5 sq ft per kg. Actual spreading may vary depending on substrate Condition and application method.
Recommended (Dft)	Approximately 2.0 mm
Drying Time @ 30o C	Temperature, humidity, air movement, film thickness and number of coats all affect the drying time.
Touch dry (hours)	½
Dry to recoat (hours)	16-18
Shelf Life	3 months minimum in original sealed bags with proper storage conditions

■ Precautions

- ✚ Prior to use, please use, read and follow product specifications, MSDS and label information.
- ✚ Do not over thin.
- ✚ Avoid contact with eye and skin.
- ✚ Use safety equipment such as rubber gloves and safety goggles.

■ Shipping

Freight Classification	Packaging	Flash Point
------------------------	-----------	-------------

HOME COAT (opc) Pvt Ltd

“Your trusted partner”

A10, Balaji Industrial Estate,

Phone No: - +91 82 6001 3001

Tondre Village, Taloja MIDC, Taloja

eMail: - connect@homecoat.in

Dist. Raigad, Panvel, Maharashtra 410208

Web: - www.homecoat.in



Paint	25 kg Plastic Bag	Water
-------	-------------------	-------